

OMRM 105RF PRO





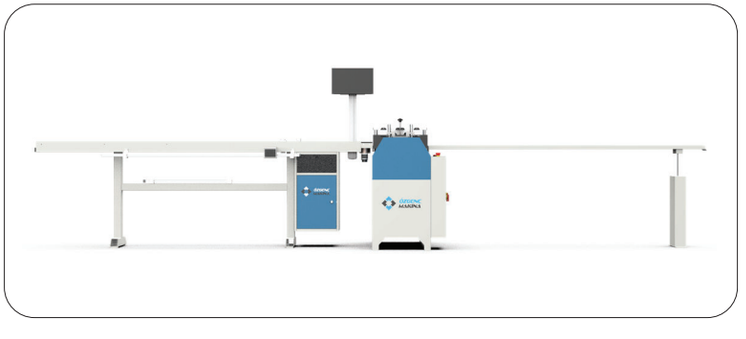

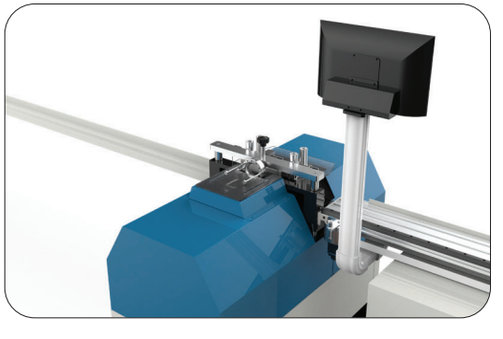

Dijital Konveyörlü Otomatik Kalıpsız Çıta Kesim Makinası
Automatic Moldless Glazing Bead Cutting Machine with Digital Conveyor

TR

- PVC cam çıtalarının 45° açıda otomatik kesim işlemi
- Kalıpsız kullanım imkanı
- 4 adet HSS testere (2 adet 200 mm - 2 adet 105 mm)
- Dikey pnömatik sıkma sistemi
- Ayar kolu ile kolay kalıp ayarlama imkânı
- Çift taraflı 45° açılı kesim sistemi
- Hızlı ayarlanabilen döner dayama sistemi
- Panoda bulunan regülatörle kesim hızını kolayca ayarlayabilme imkânı
- Sol tarafta dijital ve sağ tarafta taşıyıcı konveyör (3 m + 2,5 m)
- Servo kontrollü dayama hareketi
- İsteğe göre CSV dosyası ile veya elle ölçü girerek çalışabilme özelliği
- Servo kontrollü konveyör sayesinde yüksek hassasiyette hızlı kesim
- 15,6" dokunmatik ekranlı Windows tabanlı kontrol sistemi
- Uzaktan bağlantı ile sorun teşhisi ve servis imkanı
- Sınırsız profil hafıza kapasitesi
- Kesim dosyalarını makineye USB / kablosuz ve kablolu ağ üzerinden gönderebilme özelliği
- Kesim listesine parça ekleme veya çıkarma
- Konveyör açılma mesafesi, süresi ve hızını parametrik olarak ayarlayabilme

Opsiyon:

- Kablosuz radyo frekanslı dijital kumpas

EN

- Automatic 45° cutting of PVC glazing beads
- Mold-free operation capability
- 4 HSS saw blades (2 pieces of 200 mm – 2 pieces of 105 mm)
- Vertical pneumatic clamping system
- Easy mold adjustment via setting lever
- Double-sided 45° angled cutting system
- Quick-adjustable rotating stopper system
- Easy cutting speed adjustment using the regulator on the control panel
- 3 m digital measuring conveyor on the left and 2.5 m supporting conveyor on the right
- Servo-controlled stopper movement
- Operation via CSV file input or manual data entry
- High-speed and high-precision cutting thanks to servo-controlled conveyor
- 15.6" touch-screen Windows-based control system
- Remote connection for troubleshooting and maintenance
- Unlimited profile memory capacity
- Ability to transfer cutting files to the machine via USB, wireless, or wired network
- Ability to add or remove parts from the cutting list
- Parametric adjustment of conveyor opening distance, duration, and speed

Optional:

- Wireless radio frequency digital caliper

